



Common Name

Range	Classic Line
Retail Price Band	Under \$500
Requires	

Electrical Characteristics

Frequency Response	30Hz - 20kHz
Output Sensitivity	1.8mV/Pa
Max SPL	
Self Noise (CCIR)	
Self Noise (DIN/IEC)	
Output Impedance	200Ω
Recommended Load	1kΩ
Powering	
Supply Current	
Alternative Powering	

Switchable Options

Pad	
Filter/EQ	5 position to -18dB/100Hz, treble boost

Physical Characteristics


Connector	XLR-3M
Connector Notes	
Available Colours	Black simulated leather finish, nickel plated basket
Weight	450g (15.84oz)
Length	270mm (10.62")
Min Diameter/Width	
Max Diameter/Width	36mm (1.41")
Depth	33mm (1.29")

The 441 U features a five position bass roll-off switch, a treble boost switch, and an integral pop filter.

Accessories

Included	Clamp
Optional	Foam windshield

Frequency curve: Supercardioid

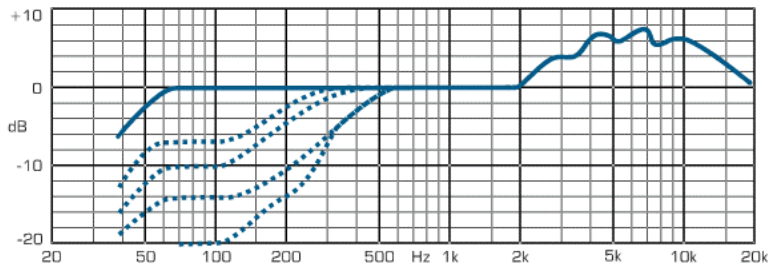

Polar curve: Supercardioid

