



Common Name

Range	30 Series
Retail Price Band	Under \$500
Requires	

Electrical Characteristics

Frequency Response	30Hz - 20kHz
Output Sensitivity	20mV/Pa
Max SPL	148dB for 1%THD
Self Noise (CCIR)	
Self Noise (DIN/IEC)	16dB-A
Output Impedance	250Ω
Recommended Load	
Powering	Phantom 12-48
Supply Current	3mA
Alternative Powering	

Switchable Options

Pad	10dB
Filter/EQ	80Hz 12dB/oct

Physical Characteristics

Connector	XLR-3M
Connector Notes	
Available Colours	
Weight	116g (4.08oz)
Length	144mm (5.66")
Min Diameter/Width	
Max Diameter/Width	21mm (0.82")
Depth	


A small condenser microphone with outstanding performance and versatility. It has a high max SPL and wide dynamic range. The low self-noise and flat, extended frequency response suit it well for today's most sophisticated digital recording equipment. The AT3032 is an omni version of the AT3031.

Accessories

Included AT8405 stand clamp, foam windscreen, pouch

Optional

Frequency curve: Omni

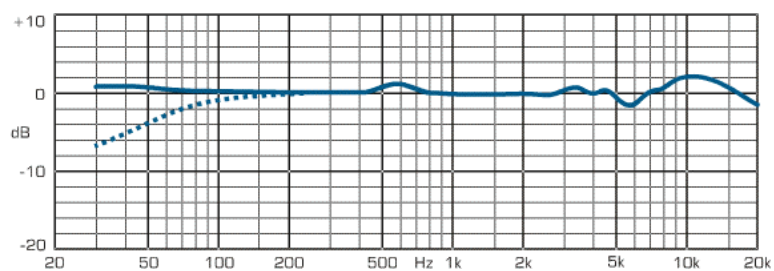

Polar curve: Omni

