



Common Name

Range	Beta Series
Retail Price Band	Under \$500
Requires	

Electrical Characteristics

Frequency Response	50Hz - 16kHz
Output Sensitivity	2.8mV/Pa
Max SPL	
Self Noise (CCIR)	
Self Noise (DIN/IEC)	
Output Impedance	290Ω
Recommended Load	
Powering	
Supply Current	
Alternative Powering	

Switchable Options

Pad	
Filter/EQ	

Physical Characteristics


Connector	XLR-3M
Connector Notes	
Available Colours	
Weight	272g (9.57oz)
Length	160mm (6.29")
Min Diameter/Width	43mm (1.69")
Max Diameter/Width	52mm (2.04")
Depth	

The Beta 57A is a high-output supercardioid dynamic microphone designed for professional sound reinforcement and project studio recording.

Accessories

Included	Swivel adaptor, storage bag, Euro thread adaptor
Optional	Windscreen

Frequency curve: Supercardioid

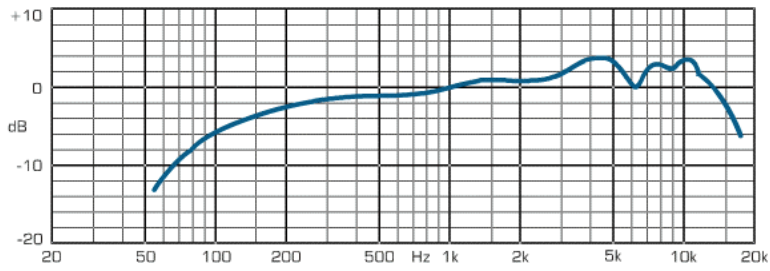

Polar curve: Supercardioid

