



Common Name

Range	Emotion Series
Retail Price Band	Under \$500
Requires	

Electrical Characteristics

Frequency Response	50Hz - 20kHz
Output Sensitivity	6mV/Pa
Max SPL	137dB for 1%THD
Self Noise (CCIR)	32dB
Self Noise (DIN/IEC)	21dB-A
Output Impedance	200Ω
Recommended Load	2kΩ
Powering	Phantom 12-48
Supply Current	2mA
Alternative Powering	9v battery

Switchable Options

Pad	
Filter/EQ	

Physical Characteristics


Connector	XLR-3M
Connector Notes	
Available Colours	Satin silver enamel
Weight	276g (9.71oz)
Length	220mm (8.66")
Min Diameter/Width	
Max Diameter/Width	34mm (1.33")
Depth	

A gradient pre-polarised condenser which uses a polar pattern converter (PPC 100) and a presence boost adaptor (PB 1000). It is ideal for a variety of recording and sound reinforcement applications. The response is specifically tailored for close working.


Accessories

Included	SA43 adaptor, W1000 w/scrn, PPC1000, PB1000 converters
Optional	MK 9/10 cable, PF 80 pop screen, ST102, 200 floor stands

### Frequency curve: Cardioid

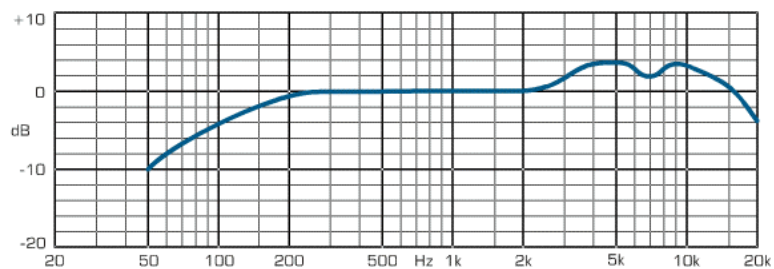

### Polar curve: Cardioid

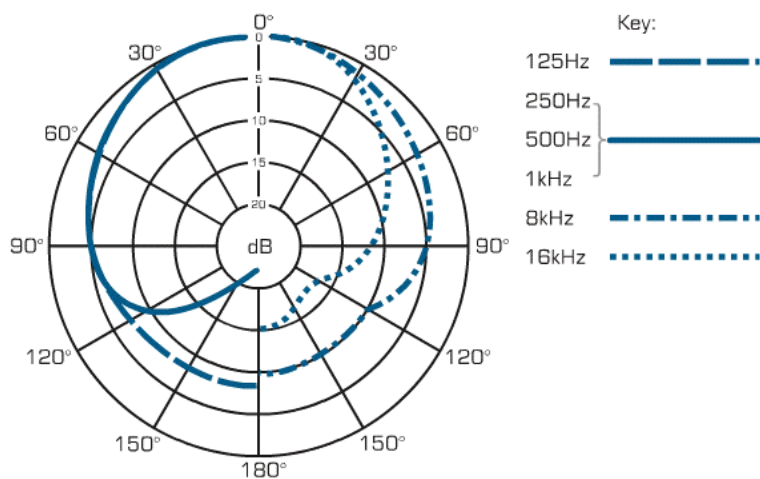

### Frequency curve: Hypercardioid

