



Electrical Characteristics

Frequency Response	30Hz - 18kHz
Output Sensitivity	4mV/Pa
Max SPL	140dB for 1%THD
Self Noise (CCIR)	24dB
Self Noise (DIN/IEC)	
Output Impedance	250Ω
Recommended Load	
Powering	Phantom 12-48
Supply Current	5mA
Alternative Powering	Internal Battery (9V)

Switchable Options

Pad	8dB
Filter/EQ	

Physical Characteristics

Connector	XLR-3M
Connector Notes	
Available Colours	Grey
Weight	650g (22.88oz)
Length	214mm (8.42")
Min Diameter/Width	
Max Diameter/Width	78mm (3.07")
Depth	46mm (1.81")

Common Name

Range	Condenser
Retail Price Band	\$500 to \$1000
Requires	


Selectable directivity, studio microphone. It can accept the very high SPL associated with wind instruments.

Accessories


Included Carry case, screwdriver, stand adapter

Optional

Frequency curve: Omni

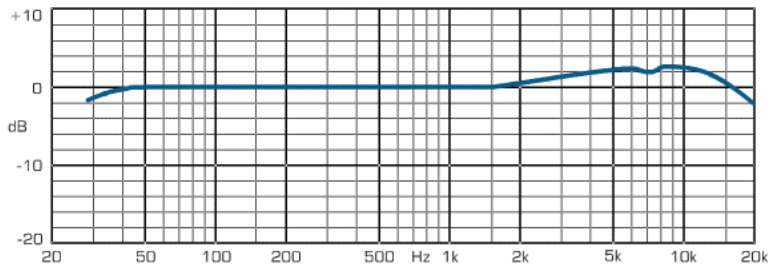

Polar curve: Omni

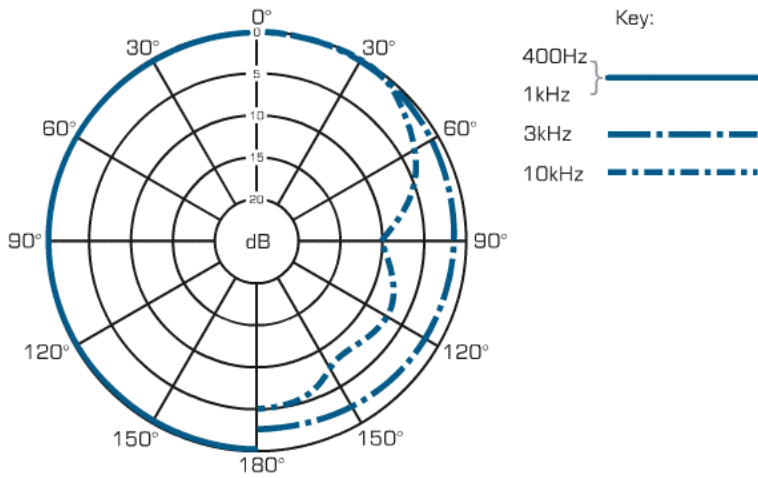

Frequency curve: Cardioid

