



Common Name

Range	E Series
Retail Price Band	No Longer Available
Requires	

Electrical Characteristics

Frequency Response	10Hz - 18kHz
Output Sensitivity	17.8mV/Pa
Max SPL	128dB for 1%THD
Self Noise (CCIR)	
Self Noise (DIN/IEC)	16dB-A
Output Impedance	200Ω
Recommended Load	
Powering	Phantom 48 only
Supply Current	
Alternative Powering	Two internal 9V rechargeable batteries

Switchable Options

Pad	20dB
Filter/EQ	80Hz

Physical Characteristics


Connector	XLR-3M
Connector Notes	
Available Colours	
Weight	624g (21.97oz)
Length	241mm (9.48")
Min Diameter/Width	
Max Diameter/Width	64mm (2.51")
Depth	

Flat response side address microphone recommended for use on everything from vocals, strings and guitars to overheads and bass.


Accessories

Included	Road case
Optional	


Frequency curve: Omni

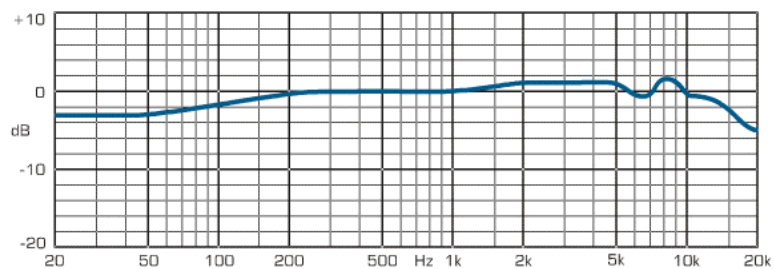


Polar curve: Omni

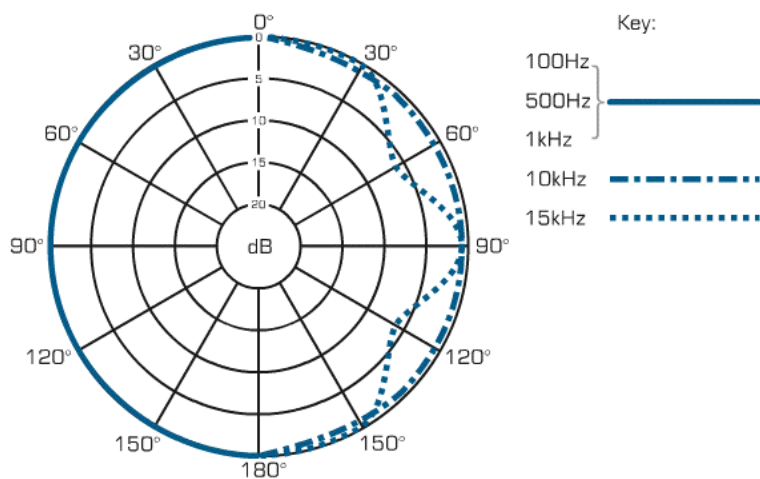


Frequency curve: Cardioid

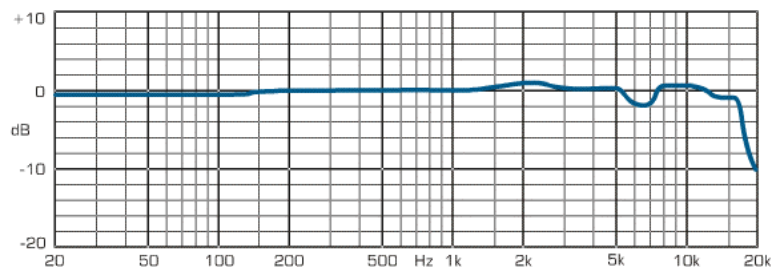

Polar curve: Cardioid

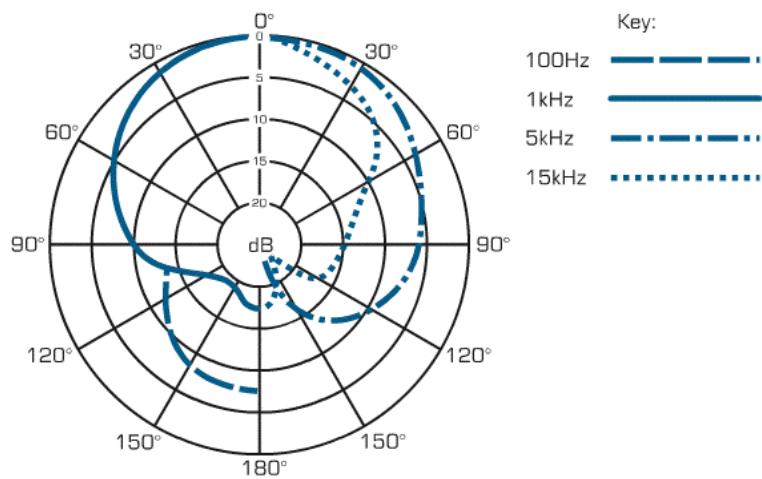

Frequency curve: Figure of 8

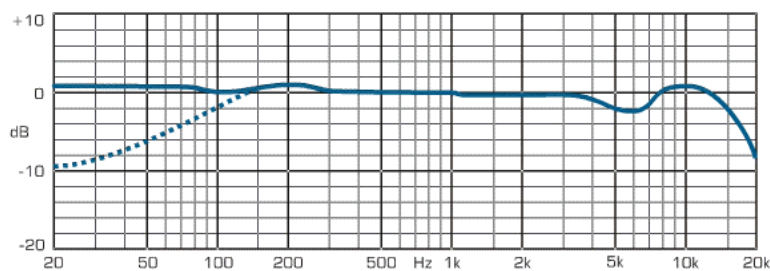

Polar curve: Figure of 8

