



Common Name

Range	KSM
Retail Price Band	\$500 to \$1000
Requires	

Electrical Characteristics

Frequency Response	20Hz - 20kHz
Output Sensitivity	16mV/Pa
Max SPL	133dB for 1%THD
Self Noise (CCIR)	
Self Noise (DIN/IEC)	13dB-A
Output Impedance	150Ω
Recommended Load	1kΩ
Powering	Phantom 48 only
Supply Current	4.65mA
Alternative Powering	

Switchable Options

Pad	15dB
Filter/EQ	80Hz 18dB/oct, 115Hz 6dB/oct

Physical Characteristics


Connector	XLR-3M
Connector Notes	
Available Colours	
Weight	490g (17.25oz)
Length	187mm (7.36")
Min Diameter/Width	
Max Diameter/Width	55.9mm (2.20")
Depth	

Side-address cardioid condenser microphone for studio recording and live sound. A large diaphragm Class-A transformerless design. Max SPL increases to 139dB for 2.5k\* load

Accessories

Included	Elastic mount, swivel adapter, case
Optional	Windscreen

Frequency curve: Cardioid

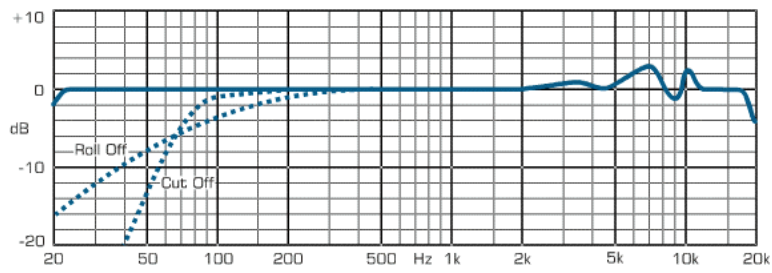

Polar curve: Cardioid

