



Common Name

Range

Retail Price Band No Longer Available

Requires

Electrical Characteristics

Frequency Response	20Hz - 20kHz
Output Sensitivity	16mV/Pa
Max SPL	130dB for 1%THD
Self Noise (CCIR)	
Self Noise (DIN/IEC)	14dB-A
Output Impedance	40Ω
Recommended Load	
Powering	Phantom 48 only
Supply Current	4mA
Alternative Powering	Phantom 24

Switchable Options

Pad	10dB
Filter/EQ	100Hz 6dB/oct

Physical Characteristics


Connector	XLR-3M
Connector Notes	
Available Colours	Silver
Weight	541g (19.04oz)
Length	204mm (8.03")
Min Diameter/Width	
Max Diameter/Width	50mm (1.96")
Depth	

A multi-pattern large diaphragm condenser microphone with JFET impedance converter and bipolar output buffer. The dual gold-sputtered diaphragms allow both omni and cardioid polar patterns.


Accessories

Included	WS2 windshield, SM1 shockmount, AI flight case
Optional	NT2-NC (without flight case or windshield)

Frequency curve: Omni

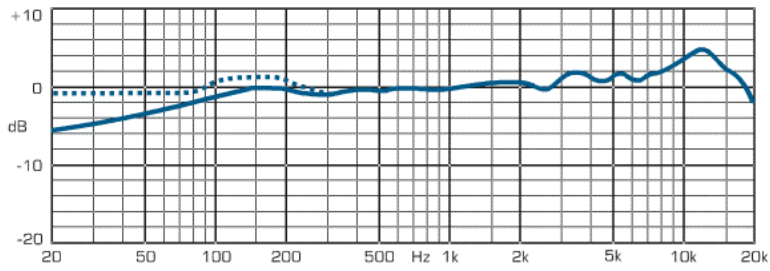

Polar curve: Omni

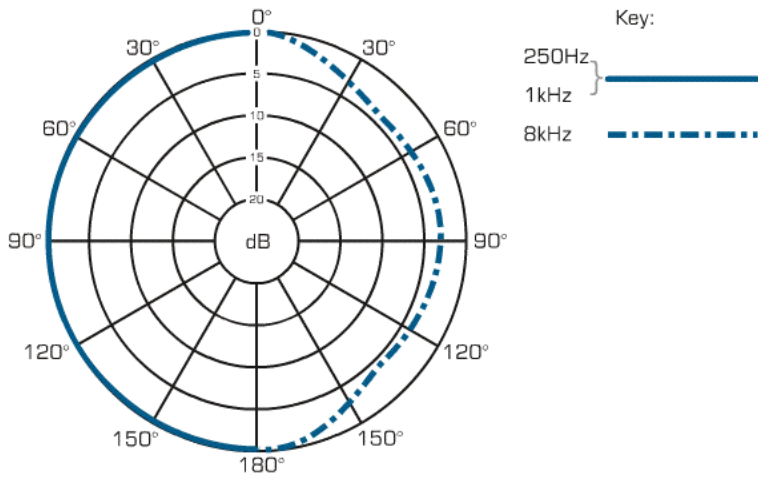

Polar curve: Cardioid

