



Common Name

Range	Pro Series
Retail Price Band	Under \$500
Requires	

Electrical Characteristics

Frequency Response	50Hz - 17kHz
Output Sensitivity	1.9mV/Pa
Max SPL	149dB for 1%THD
Self Noise (CCIR)	
Self Noise (DIN/IEC)	34dB-A
Output Impedance	200Ω
Recommended Load	
Powering	Phantom 12-48
Supply Current	2mA
Alternative Powering	Phantom >9V

Switchable Options

Pad	
Filter/EQ	150Hz 6dB/oct

Physical Characteristics


Connector	XLR-3M
Connector Notes	
Available Colours	
Weight	7g (0.24oz)
Length	24.8mm (0.97")
Min Diameter/Width	10.2mm (0.40")
Max Diameter/Width	
Depth	

Ideal for woodwinds, brass, strings, piano, snare and toms, the PRO 35x handles high-intensity sound without distortion. It is perfect for active stage performances and the UniMount® clip permits accurate positioning while protecting the element. The 1.8m cable is permanently attached, with screw terminals at the power module. Also available as the PRO 35xcW without the power module and with a 1.4m cable terminated with 4-pin connector for A-T UniPak™ wireless systems.

Accessories

Included	Instrument mount
Optional	

Frequency curve: Cardioid

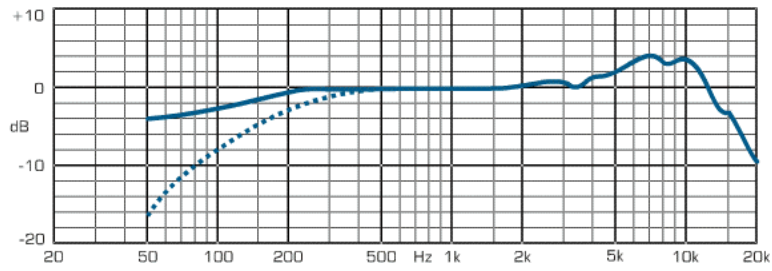

Polar curve: Cardioid

