



Common Name

Range	Pro Series
Retail Price Band	Under \$500
Requires	

Electrical Characteristics

Frequency Response	30Hz - 15kHz
Output Sensitivity	7.9mV/Pa
Max SPL	141dB for 1%THD
Self Noise (CCIR)	
Self Noise (DIN/IEC)	29dB-A
Output Impedance	200Ω
Recommended Load	
Powering	Phantom 12-48
Supply Current	2mA
Alternative Powering	Phantom >9V

Switchable Options

Pad	
Filter/EQ	

Physical Characteristics


Connector	XLR-3M
Connector Notes	
Available Colours	
Weight	60g (2.11oz)
Length	99mm (3.89")
Min Diameter/Width	
Max Diameter/Width	21mm (0.82")
Depth	

The PRO 37R provides professional accuracy for studio recording and is ideal for acoustic guitar, overheads, reeds, brass, piano and more. Its low-mass element provides superb transient response and it delivers undistorted output even when used close to high-SPL instruments. It offers an extremely uniform cardioid polar pattern and extended response.

Accessories

Included	Stand clamp, foam windscreen
Optional	

Frequency curve: Cardioid

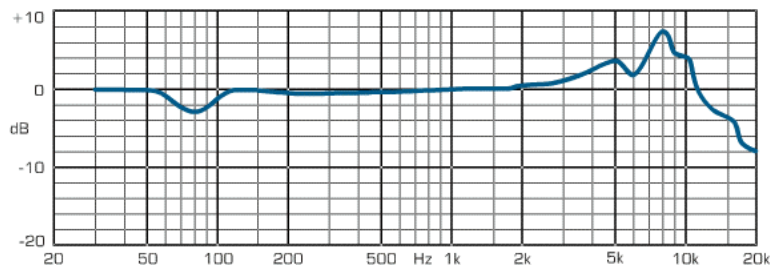

Polar curve: Cardioid

