



Common Name

Range	SM series
Retail Price Band	Under \$500
Requires	

Electrical Characteristics

Frequency Response	40Hz - 15kHz
Output Sensitivity	1.9mV/Pa
Max SPL	
Self Noise (CCIR)	
Self Noise (DIN/IEC)	
Output Impedance	310Ω
Recommended Load	
Powering	
Supply Current	
Alternative Powering	

Switchable Options

Pad	
Filter/EQ	

Physical Characteristics


Connector	XLR-3M
Connector Notes	
Available Colours	
Weight	284g (10oz)
Length	157mm (6.18")
Min Diameter/Width	23mm (0.90")
Max Diameter/Width	32mm (1.25")
Depth	

Unidirectional dynamic microphone for musical instrument pickup or for vocals. Its frequency response is tailored for drums, guitars and vocals.

Accessories

Included	Swivel adaptor, storage bag
Optional	Windscreen

Frequency curve: Cardioid

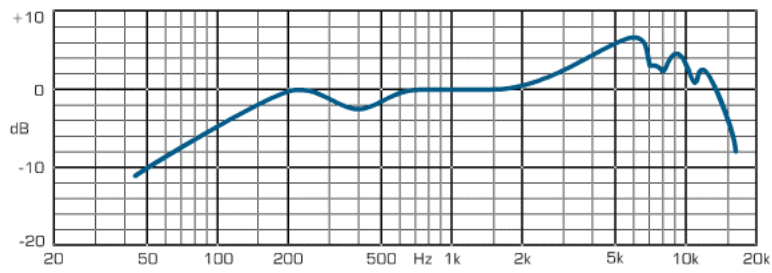

Polar curve: Cardioid

