



Common Name

Range	SM series
Retail Price Band	Under \$500
Requires	

Electrical Characteristics

Frequency Response	40Hz - 16kHz
Output Sensitivity	1.12mV/Pa
Max SPL	
Self Noise (CCIR)	
Self Noise (DIN/IEC)	
Output Impedance	150Ω
Recommended Load	
Powering	
Supply Current	
Alternative Powering	

Switchable Options

Pad	
Filter/EQ	150Hz

Physical Characteristics


Connector	XLR-3M
Connector Notes	
Available Colours	
Weight	764g (26.90oz)
Length	190mm (7.48")
Min Diameter/Width	63.5mm (2.5")
Max Diameter/Width	96mm (3.77")
Depth	149mm (5.86")

Unidirectional dynamic microphone with a very smooth, flat, wide range frequency response. Switchable mid-range emphasis.

Accessories

Included	
Optional	Desk stand

Frequency curve: Cardioid

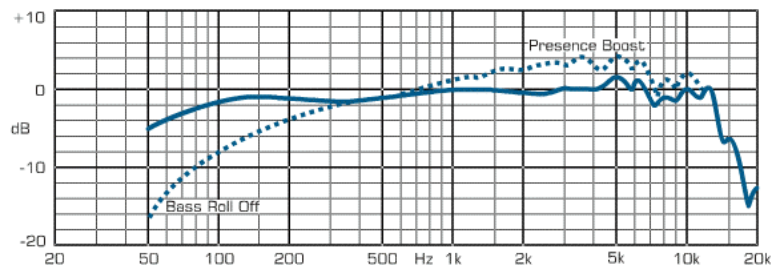

Polar curve: Cardioid

