



Common Name

Range	SR Series
Retail Price Band	Under \$500
Requires	

Electrical Characteristics

Frequency Response 10Hz - 20kHz

Output Sensitivity	8mV/Pa
Max SPL	145dB for 1%THD
Self Noise (CCIR)	
Self Noise (DIN/IEC)	27dB-A
Output Impedance	50Ω
Recommended Load	10kΩ
Powering	Phantom 48 only
Supply Current	10mA
Alternative Powering	24V with reduced headroom

Switchable Options

Pad	
Filter/EQ	

Physical Characteristics


Connector	XLR-3M
Connector Notes	
Available Colours	Black
Weight	90g (3.16oz)
Length	160mm (6.29")
Min Diameter/Width	7.1mm (0.27")
Max Diameter/Width	22mm (0.86")
Depth	

The SRO (Sound Reinforcement Omni) is a low profile, low cost omni for live sound and recording use. The TC20 is identical.

Accessories

Included	Clip
Optional	

Frequency curve: Omni

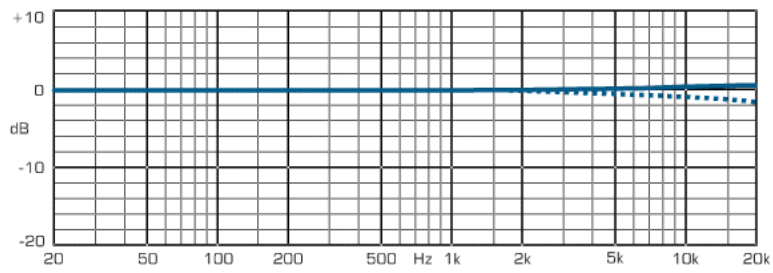

Polar curve: Omni

